



## 78L05 Three-terminal positive voltage regulator

### FEATURES

- Maximum Output Current  $I_O$ : 0.1 A
- Output Voltage  $V_O$ : 5 V
- Continuous Total Dissipation  
 $P_D$ : 0.6 W ( $T_a = 25^\circ\text{C}$ )




### ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	$V_I$	30	V
Operating Junction Temperature Range	$T_{OPR}$	-40~+125	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55~+150	$^\circ\text{C}$

### ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ( $V_i=10\text{V}, I_o=40\text{mA}, C_i=0.33\mu\text{F}, C_o=0.1\mu\text{F}$ , unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output voltage	$V_o$	$25^\circ\text{C}$	4.8	5.0	5.2	V
		$7\text{V} \leq V_i \leq 20\text{V}, I_o=1\text{mA} \sim 40\text{mA}$	4.75	5.0	5.25	V
		$I_o=1\text{mA} \sim 70\text{mA}$	4.75	5.0	5.25	V
Load Regulation	$\Delta V_o$	$I_o=1\text{mA} \sim 100\text{mA}$		15	60	mV
		$I_o=1\text{mA} \sim 40\text{mA}$		8	30	mV
Line regulation	$\Delta V_o$	$7\text{V} \leq V_i \leq 20\text{V}$		32	150	mV
		$8\text{V} \leq V_i \leq 20\text{V}$		26	100	mV
Quiescent Current	$I_q$	$25^\circ\text{C}$		3.8	6	mA
Quiescent Current Change	$\Delta I_q$	$8\text{V} \leq V_i \leq 20\text{V}$			1.5	mA
		$1\text{mA} \leq I_o \leq 40\text{mA}$			0.1	mA
Output Noise Voltage	$V_N$	$10\text{Hz} \leq f \leq 100\text{kHz}$		42		$\mu\text{V}$
Ripple Rejection	RR	$8\text{V} \leq V_i \leq 20\text{V}, f=120\text{Hz}$		41	49	dB
Dropout Voltage	$V_d$	$25^\circ\text{C}$		1.7		V

### TYPICAL APPLICATION

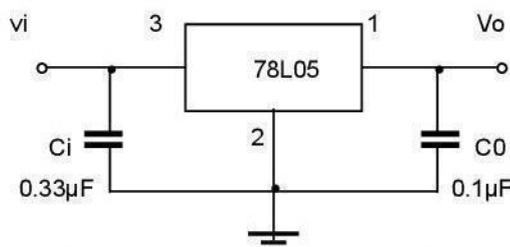

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

# Typical Characteristics

